




Wet or dry tile core drill specially designed for core drilling either blind or through holes in tiles, ceramics, porcelain, stone, concrete, masonry, glass and similar materials.


TC402 | TILE CORE DRILL
10101-040-200-3060-001-026



■ **Suction Centering Guide (Standard)**



■ **Water Supply Kit (Standard)**

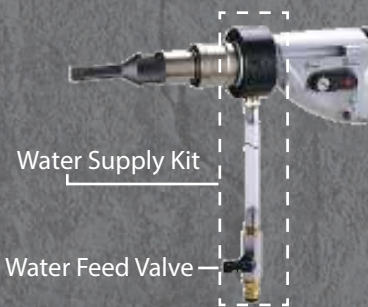

DEALER

	MODEL
	TC402
Power Input	620W
Voltage	220-240V~ 50/60Hz or 110-120V~ 50/60Hz
No Load / Rated Load min ⁻¹	
Speed 1	4500 / 2700
Speed 2	7500 / 4500
Capacity	40mm (1 9/16")
Adapter Thread	G 1/2" BSP, M14-2,0
Protection Class	Class II with PRCD / GFCI
Neck Diameter	43mm
Dimensions	348 x 100 x 300 mm
Net WeightWeight	2,5kg (5,51 Lbs)